



LM500-D Series

LM500-D Series combines technology warning light and siren Solaris compact LEDs manufactured in ABS with fiberglass and aluminum.

Optical system composed of a microprocessor integrated electronic circuit, 15 high intensity LEDs and a parabolic reflector maximizes light intensity of LEDs and avoids the appearance of black shadows.


His acoustic system consisting of a 30W speaker, with programmable tone, with a cigarette lighter socket 3 positions.

A wire mesh filter prevents the ingress of solid particles by the broadcaster of the siren, a drainage system prevents the accumulation of water in the membrane and a rubber gasket prevents water ingress into the electronic circuitry.

LM500-D Solaris, has a magnet system with a set of 4 magnets with silicone anti-scratch protection and 4 cups.

Available in blue, amber or red LED.

New tone "Stat" available for Germany.

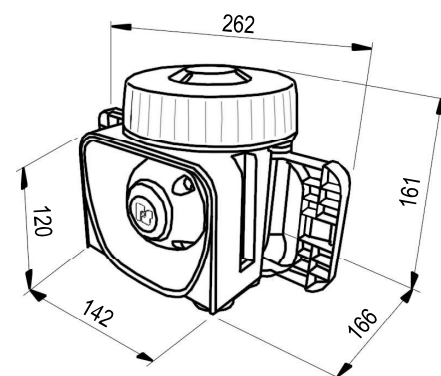

LM500-D Solaris Series dimensions (mm).

Voltage:	12 V
Light current consumption:	0.6 Amp
Siren current consumption:	3 Amp
Siren output power:	30W
Siren output voltage:	23 V
Operating temperature:	-20°C to 50°C
Weight:	2.28 kg

REF.	MOD.	DESCRIPTION
2003059	LM500-DP	Solaris LED warning light blue with integrated 30W siren. Cigarette plug w/ 3 positions for light and siren control, programmable tone, 12V. UN R65 Approval T Category
2003060	LM500-DP	Solaris LED warning light amber with integrated 30W siren. Cigarette plug w/ 3 positions for light and siren control, programmable tone, 12V. UN R65 Approval T Category
2003061	LM500-DP	Solaris LED warning light red with integrated 30W siren. Cigarette plug w/ 3 positions for light and siren control, programmable tone, 12V. UN R65 Approval T Category

(**) For other tones, please contact with the Sales Department.

(***) Magnetic mounting models produced for a temporary use on the roof of the vehicle.